


### Wall Mounted Ozone Generator **GQO-V08**

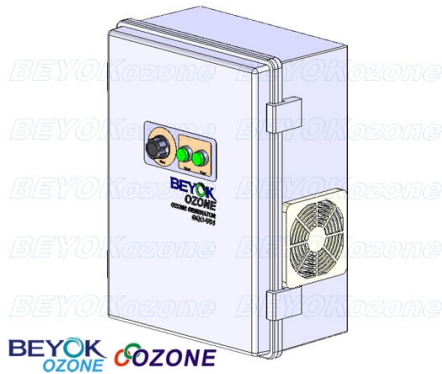

Ozone Output:	6-8 g/hr@3Lpm O2
Ozone Generating Method:	Corona Discharge
Electrical:	220V/50Hz-120V/60Hz, 110W
Ozone Control:	50-100% variable
Control:	0-30minutes timer Outer loop timer
Cooling Method:	Air cooled
Inlet & Outlet Connection:	0.3"*0.2"(8*6mm)Stainless steel& Hose
Case:	Plastic
Dimension(LxWxH):	11.6" *15.4" *6.7" (294*390*170 mm)
Net Weight:	13.5lbs (6.1 kg)

The GQO-V series of BEYOK wall mounted ozone generators can mix ozone into water to destroy bacteria, purify air and eliminate peculiar smell. Connect to the external oxygen source will provide a higher concentration of ozone.

#### Features:

- Wall mounted
- 50~100% variable ozone output control
- Compact design and simple operation
- Oxygen or dry air feed
- High efficiency
- Work continuously
- Economical, and low running costs
- Long working life

#### Benefits:

- High efficient broad-spectrum sterilization
- Good dispersion
- Without ozone residual and secondary pollution

#### Application:

- Sterilization and disinfection: restaurant, hospital, packing workshop, food factory.
- Food fresh keeping: refrigerated storage.
- Deodorization: basement, garage, store room, hotel.

#### Size View:

