

FILTROS PULIDORES EN ACERO INOXIDABLE


Descripción del producto:

- ✓ Modelos con tapa de cerramiento con abrazadera o con bridas.
- ✓ Acero 304 o 316 L.
- ✓ Superficie pulida
- ✓ Interior: pulido electrofítico.
- ✓ Máxima presión de operación: 90 psi



Modelo	A	B	C	D	E	Conexión	GPM
WTJ-5x10"	7.09	31.52	1.58	2.96	5.71	1"	25.00
WTJ-3x20"	8.67	21.67	11.82	2.96	6.90	1"	30.00
WTJ-5x20"	8.67	31.52	15.76	2.96	6.90	1 1/2"	50.00
WTJ-5x30"	8.67	42.55	15.76	2.96	6.90	1 1/2"	75.00
WTJ-5x40"	8.67	54.37	15.76	2.96	6.90	1 1/2"	100.00
WTJ-7x20"	10.64	31.52	15.76	2.96	8.47	1 1/2"	70.00
WTJ-7x30"	10.64	42.55	15.76	2.96	8.47	1 1/2"	105.00
WTJ-7x40"	10.64	54.37	15.76	2.96	8.47	1 1/2"	140.00
WTJ-10x20"	11.82	31.52	15.76	2.96	9.26	1 1/2"	100.00
WTJ-10x30"	11.82	42.55	15.76	2.96	9.26	1 1/2"	150.00
WTJ-10x40"	11.82	54.37	15.76	2.96	9.26	2"	200.00

Nota: los flujos están calculados para un Micraje hasta de 20µ con un diferencial de presión de 0.35 psi. Dimensiones dadas en pulgadas.

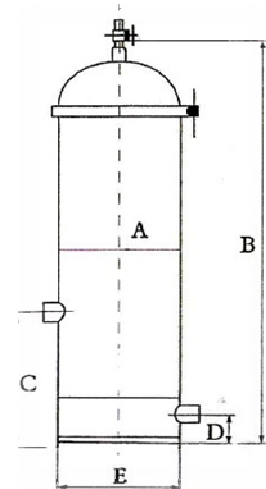

Información y ventas

PBX: (502) 6634-3737

Email: info@ecotec-centroamerica.com

Web: www.ecotec-centroamerica.com

Guatemala-Guatemala