


FILTRO OXIDANTE CON KATALOX

COMPONENTES DEL SISTEMA

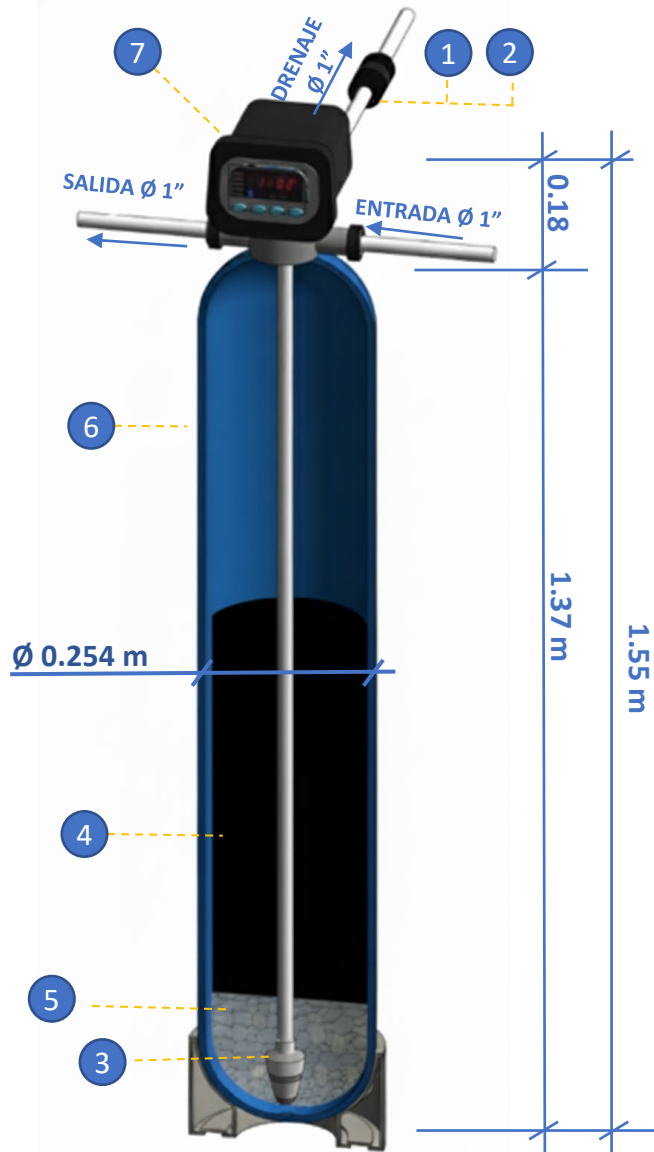

KIT150		FILTRO OXIDANTE KATALOX		
No.	Componente	Descripción	Cantidad	
1	CFL002	HOUSING P/CONTROL FLUJO 5 10 (3/4 PVC)	1.00	
2	CFL055	INSERTO PARA CONTROL DE FLUJO 7GPM	1.00	
3	HBL008	BOTTOM DISTRIBUTOR (INFERIOR) 3/4" JD210	1.00	
4	MFI024	KATALOX LIGHT DE 30 KGS	1.00	
5	MFL605	GRAVA FILTRANTE #1	0.25	
6	TNQ101	TANQUE PARA FILTRO FRP 10X54	1.00	
7	VVL012	VALVULA AUTO P/FILTRO DE 1" 26 GPM F67C1	1.00	

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ²		4
FLUJO EN RETROLAVADO @ 15 GPM FT ²		7
TEMPERATURA MAXIMA		50 °C
PRESIÓN MAXIMA		100 PSI
PRESIÓN MINIMA DE ENTRADA		25 PSI
CONEXIÓN ELECTRICA		
	VOLTAJE	110 V
	FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS		
	ENTRADA	1
	SALIDA	1
	DRENAJE	1

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

EWS
OXGP110A

FILTRO OXIDANTE AUTOMATICO

