


FILTRO OXIDANTE CON KATALOX

COMPONENTES DEL SISTEMA

KIT152			
FILTRO OXIDANTE KATALOX			
No.	Componente	Descripción	Cantidad
1	CFL003	HOUSING P/CONTROL FLUJO 12 20 (1" PVC)	1.00
2	CFL056	INSERTO P/CONTROL DE FLUJO 15 GPM	1.00
3	HBL008	BOTTOM DISTRIBUTOR (INFERIOR) 3/4" JD210	1.00
4	MFI024	KATALOX LIGHT DE 30 KGS	3.00
5	MFL605	GRAVA FILTRANTE #1	0.50
6	TNQ103	TANQUE PARA FILTRO FRP 14X65	1.00
7	VVL012	VALVULA AUTO P/FILTRO DE 1" 26 GPM F67C1	1.00

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ²		9
FLUJO EN RETROLAVADO @ 15 GPM FT ²		15
TEMPERATURA MAXIMA		50 °C
PRESIÓN MAXIMA		100 PSI
PRESIÓN MINIMA DE ENTRADA		25 PSI
CONEXIÓN ELECTRICA		
	VOLTAJE	110 V
	FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS		
	ENTRADA	1
	SALIDA	1
	DRENAJE	1

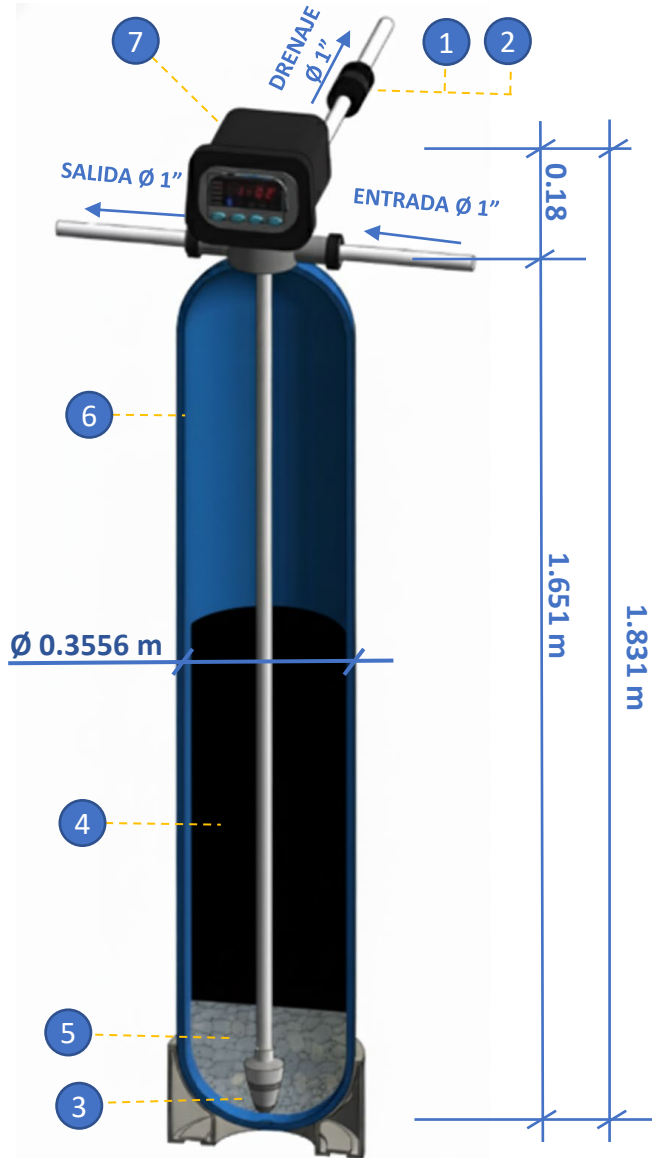

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

EWS
OXGP114A

FILTRO OXIDANTE AUTOMATICO

