


FILTRO OXIDANTE CON KATALOX

COMPONENTES DEL SISTEMA

KIT153			
FILTRO OXIDANTE KATALOX			
No.	Componente	Descripción	Cantidad
1	ATQ003	ADAPTER 4" 2.5" REDUC DE 4" A 2.5" JD504	1.00
2	CFL003	HOUSING P/CONTROL FLUJO 12 20 (1" PVC)	1.00
3	CFL057	INSERTO P/CONTROL DE FLUJO 20 GPM	1.00
4	HBL012	HUB AND LATERAL P/TANQUE DE 16" JD301 (HU6260)	1.00
5	MFI024	KATALOX LIGHT DE 30 KGS	4.00
6	MFL605	GRAVA FILTRANTE #1	0.70
7	TNQ104	TANQUE PARA FILTRO FRP 16X65	1.00
8	VVL012	VALVULA AUTO P/FILTRO DE 1" 26 GPM F67C1	1.00

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ²	14
FLUJO EN RETROLAVADO @ 15 GPM FT ²	20
TEMPERATURA MAXIMA	50 °C
PRESIÓN MAXIMA	100 PSI
PRESIÓN MINIMA DE ENTRADA	25 PSI
CONEXIÓN ELECTRICA	
VOLTAJE	110 V
FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS	
ENTRADA	1
SALIDA	1
DRENAJE	1

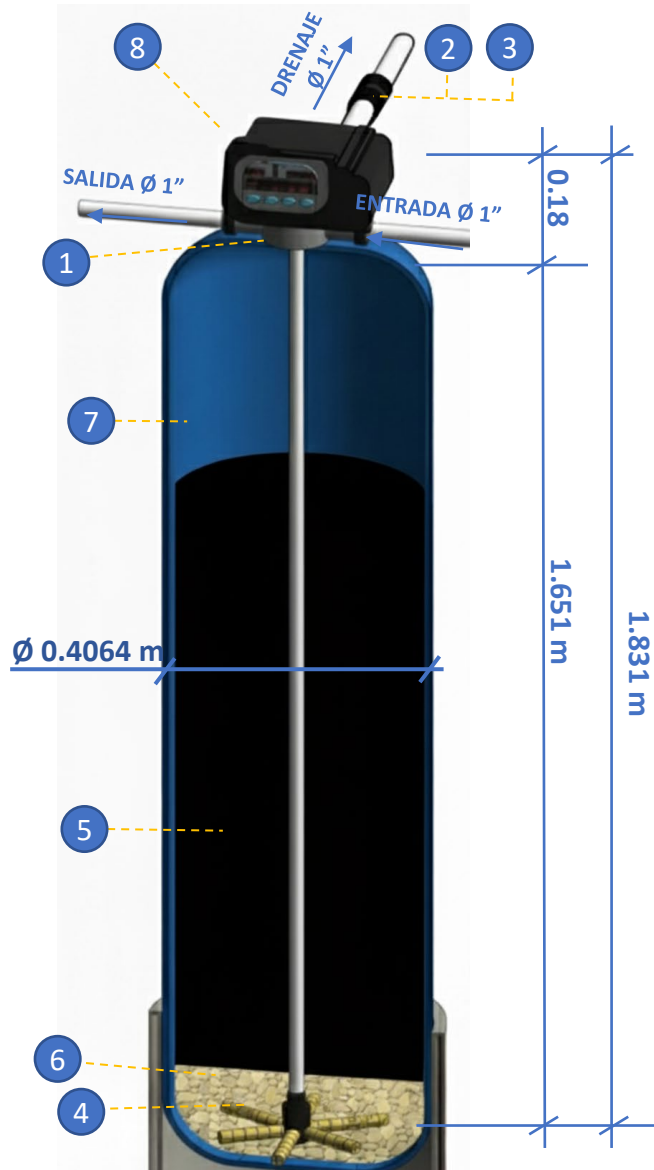

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

EWS
OXGP116A

FILTRO OXIDANTE AUTOMATICO

