


FILTRO OXIDANTE CON KATALOX

COMPONENTES DEL SISTEMA

KIT155		FILTRO OXIDANTE KATALOX		
No.	Componente	Descripción	Cantidad	
1	CFL052	HOUSING CONTROL DE FLUJO 11/2" MAX 40 GPM (4 AGUJEROS)	1.00	
2	CFL053	INSERTO PARA CONTROL DE FLUJO 5.0 GPM	1.00	
3	CFL054	INSERTO PARA CONTROL DE FLUJO 10GPM	3.00	
4	HBL013	HUB AND LATERAL P/TANQUE 18" A 21 JD302 (HU6370)	1.00	
5	MFI024	KATALOX LIGHT DE 30 KGS	7.00	
6	MFL605	GRAVA FILTRANTE #1	0.50	
7	MFL607	GRAVA FILTRANTE #2	0.70	
8	TNQ106	TANQUE PARA FILTRO FRP 21X62	1.00	
9	VVL027	VALVULA AUTO P/FILTRO 2" 44GPM F75B1	1.00	

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ²	19
FLUJO EN RETROLAVADO @ 15 GPM FT ²	35
TEMPERATURA MAXIMA	50 °C
PRESIÓN MAXIMA	100 PSI
PRESIÓN MINIMA DE ENTRADA	25 PSI
CONEXIÓN ELECTRICA	
VOLTAJE	110 V
FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS	
ENTRADA	2
SALIDA	2
DRENAJE	2

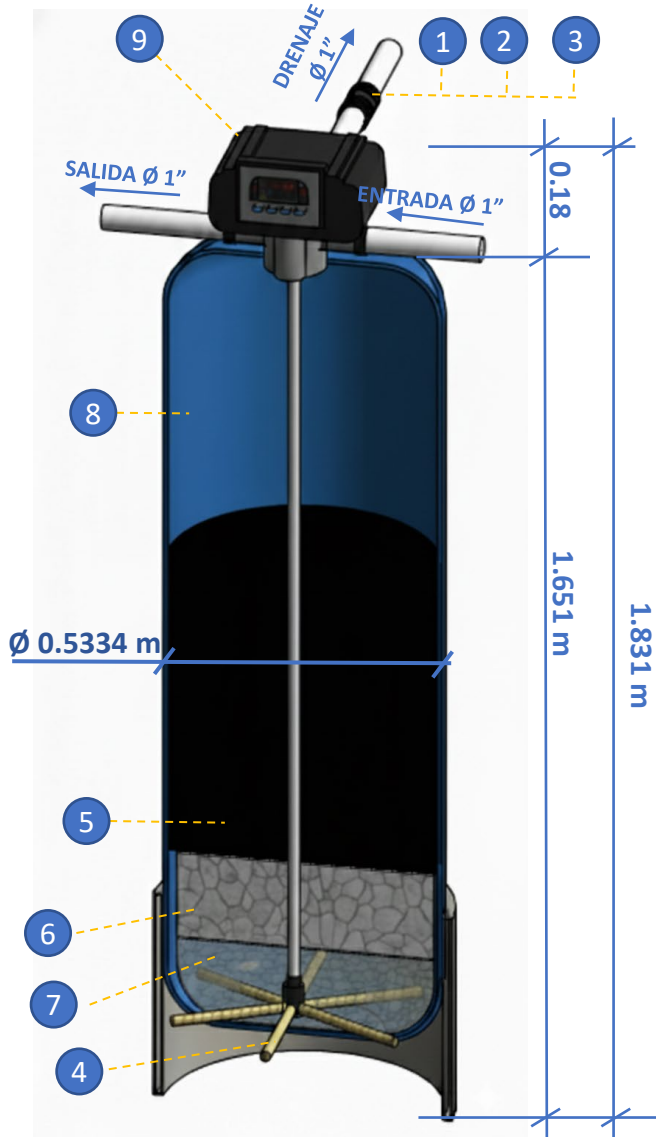

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCION PARCIAL O TOTAL DE ESTE DOCUMENTO

EWS
OXGP121A

FILTRO OXIDANTE AUTOMATICO

