


FILTRO OXIDANTE CON KATALOX

COMPONENTES DEL SISTEMA

KIT160	FILTRO OXIDANTE KATALOX		
No.	Componente	Descripción	Cantidad
1	HBL031	DISTRIBUIDOR SUP/FLANGE TANQUE 48 A 64" JD416	1.00
2	HBL033	DISTRIBUIDOR INFER. CON FLANGE P/TNQ 48" JD422	1.00
3	MFI024	KATALOX LIGHT DE 30 KGS	34.00
4	MFL605	GRAVA FILTRANTE #1	3.00
5	MFL607	GRAVA FILTRANTE #2	5.00
6	MFL608	GRAVA FILTRANTE # 3	2.00
7	TNQ111	TANQUE PARA FILTRO FRP 48X72	1.00
8	VVL030	VALVULA AUTOMATICA P/ FILTRO 40 M3/H F112B1	1.00
9	KIT113	KIT ENSAMBLE DE TUBERIA MM	1.00

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ²	101
FLUJO EN RETROLAVADO @ 15 GPM FT ²	185
TEMPERATURA MAXIMA	50 °C
PRESIÓN MAXIMA	100 PSI
PRESIÓN MINIMA DE ENTRADA	25 PSI
CONEXIÓN ELECTRICA	
VOLTAJE	110 V
FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS	
ENTRADA	3
SALIDA	3
DRENAJE	3

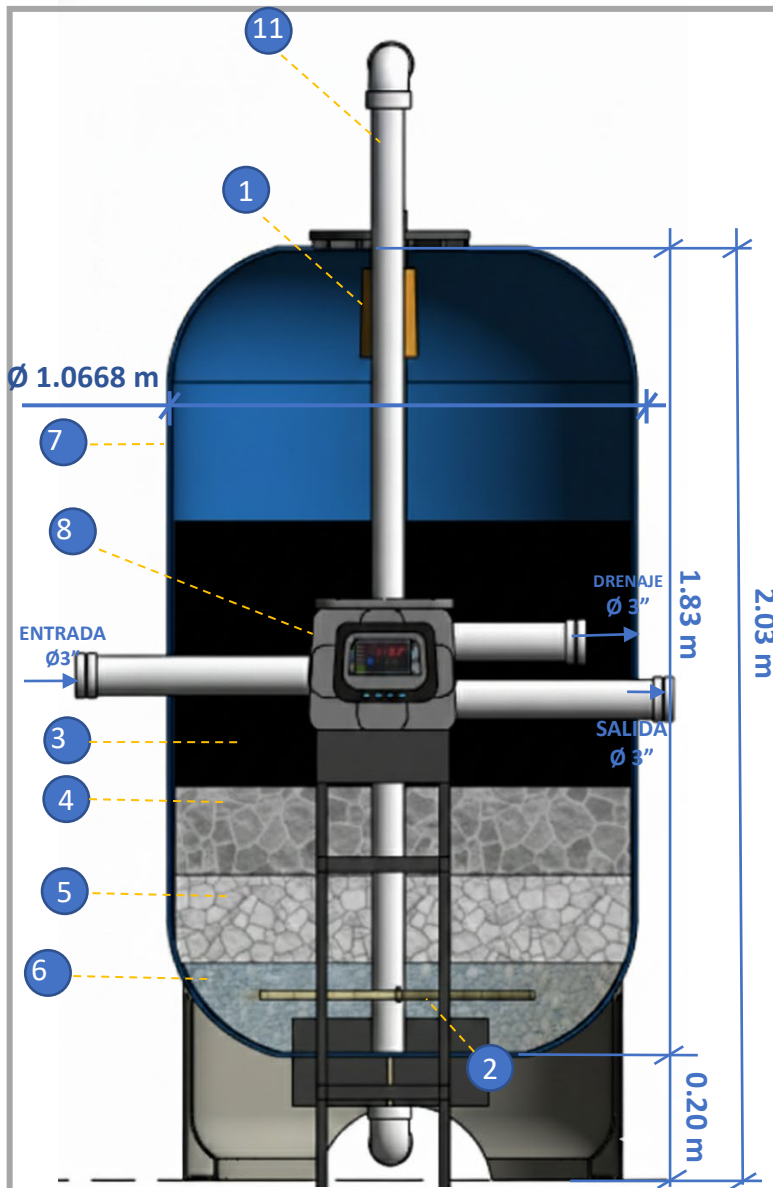

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

EWS
OXGP148A

FILTRO OXIDANTE AUTOMATICO

