


FILTRO OXIDANTE CON KATALOX

COMPONENTES DEL SISTEMA

KIT162			
FILTRO OXIDANTE KATALOX MANUAL			
No.	Componente	Descripción	Cantidad
1	CFL003	HOUSING P/CONTROL FLUJO 12 20 (1" PVC)	1.00
2	CFL056	INSERTO P/CONTROL DE FLUJO 15 GPM	1.00
3	HBL008	BOTTOM DISTRIBUTOR (INFERIOR) 3/4" JD210	1.00
4	MFI024	KATALOX LIGHT DE 30 KGS	2.00
5	MFL605	GRAVA FILTRANTE #1	0.35
6	TNQ007	TANQUE FRP EWS 1354 TOP 2.5"	1.00
7	VVL006	VALVULA MANUAL P/FILTRO 1" IN OUT F56A1	1.00

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ²	7
FLUJO EN RETROLAVADO @ 15 GPM FT ²	15
TEMPERATURA MAXIMA	50 °C
PRESIÓN MAXIMA	87 PSI
PRESIÓN MINIMA DE ENTRADA	22 PSI
CONEXIÓN ELECTRICA	
VOLTAJE	110 V
FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS	
ENTRADA	1
SALIDA	1
DRENAJE	1

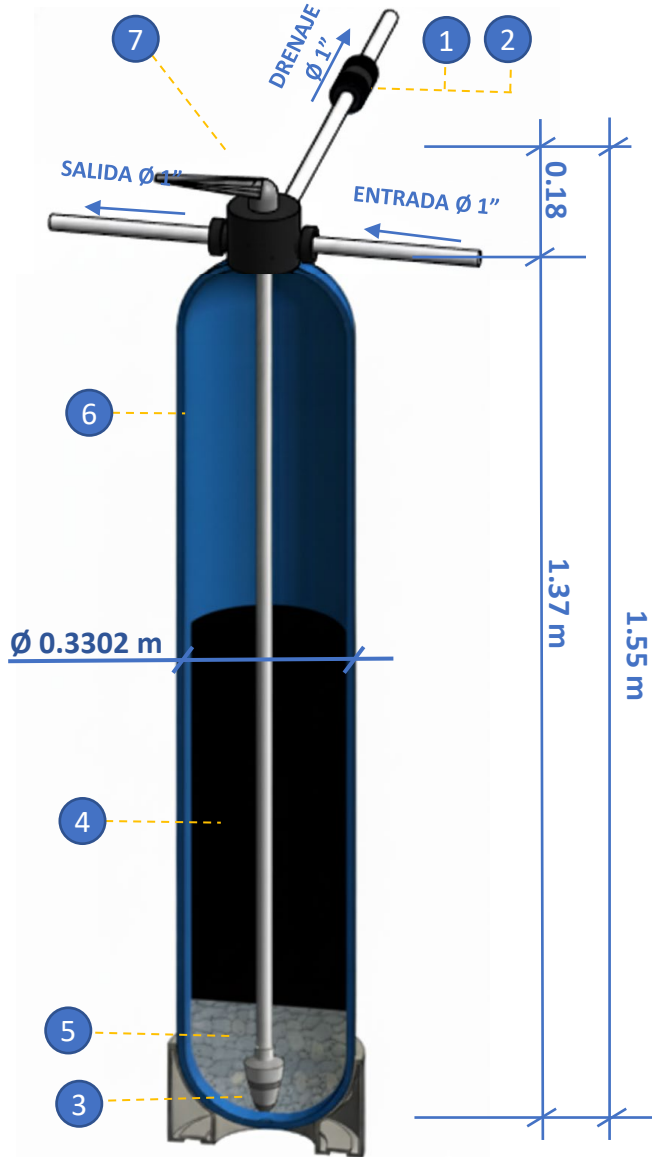

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

**EWS-
OXGP113M**

FILTRO OXIDANTE MANUAL

