


FILTRO DE CARBÓN ACTIVADO

COMPONENTES DEL SISTEMA

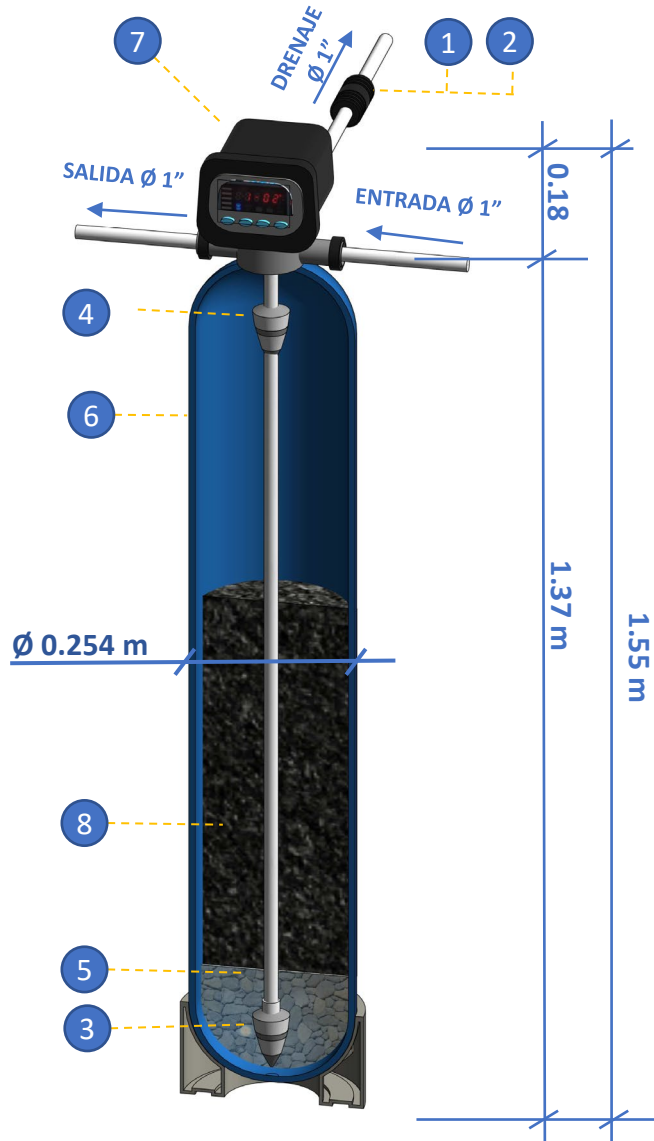

KIT012 FILTRO DE CARBÓN ACTIVADO EWS-CA110A			
No.	Componente	Descripción	Cantidad
1	CFL002	HOUSING P/CONTROL FLUJO 5-10 (3/4 PVC)	1.00
2	CFL053	INSERTO PARA CONTROL DE FLUJO 5.0 GPM	1.00
3	HBL008	BOTTOM DISTRIBUTOR (INFERIOR) 3/4" JD210	1.00
4	HBL010	TOP DISDRIBUIDOR 3/4 (SUPERIOR)	1.00
5	MFL605	GRAVA FILTRANTE #1	0.25
6	TNQ101	TANQUE 10X54 WAVE CYBER	1.00
7	VVL012	VÁLVULA AUTO P/FILTRO DE 1" 26 GPM F67C1	1.00
8	C105	CARBON GAC 12X40 W 25 KGS. C/U	0.60

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ² - DECLORINACIÓN		5
FLUJO EN SERVICIO @ 5 GPM FT ² - REMOCIÓN DE ORGANICOS		3
FLUJO EN RETROLAVADO		5
TEMPERATURA MAXIMA		42 °C
PRESIÓN MAXIMA		100 PSI
PRESIÓN MINIMA DE ENTRADA		25 PSI
CONEXIÓN ELECTRICA		
VOLTAJE		110 V
FRECUENCIA		60 Hz
CONEXIONES HIDRAULICAS		
ENTRADA		1
SALIDA		1
DRENAJE		1

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

EWS
CA110A

FILTRO DE CARBÓN ACTIVADO

