


FILTRO DE CARBÓN ACTIVADO

COMPONENTES DEL SISTEMA

KIT067				FILTRO DE CARBÓN ACTIVADO MANUAL EWS-CA110M		
No.	Componente	Descripción		Cantidad		
1	CFL002	HOUSING P/CONTROL FLUJO 5 10 (3/4 PVC)		1.00		
2	CFL053	INSERTO PARA CONTROL DE FLUJO 5.0 GPM		1.00		
3	HBL010	TOP DISTRIBUTOR (SUPERIOR) 3/4" JD209		1.00		
4	HBL008	BOTTOM DISTRIBUTOR (INFERIOR) 3/4" JD210		1.00		
5	MFL605	GRAVA FILTRANTE #1		0.25		
6	TNQ002	TANQUE FRP EWS 1054 TOP 2.5"		1.00		
7	VVL006	VALVULA MANUAL P/FILTRO 1" IN OUT F56A1		1.00		
8	C105	CARBON GAC 12X40 W 25 KGS. C/U		0.60		

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ² - DECLORINACIÓN		5
FLUJO EN SERVICIO @ 5 GPM FT ² - REMOCIÓN DE ORGANICOS		3
FLUJO EN RETROLAVADO		5
TEMPERATURA MAXIMA		42 °C
PRESIÓN MAXIMA		100 PSI
PRESIÓN MINIMA DE ENTRADA		25 PSI
CONEXIÓN ELECTRICA		
VOLTAJE		110 V
FRECUENCIA		60 Hz
CONEXIONES HIDRAULICAS		
ENTRADA		1
SALIDA		1
DRENAJE		1

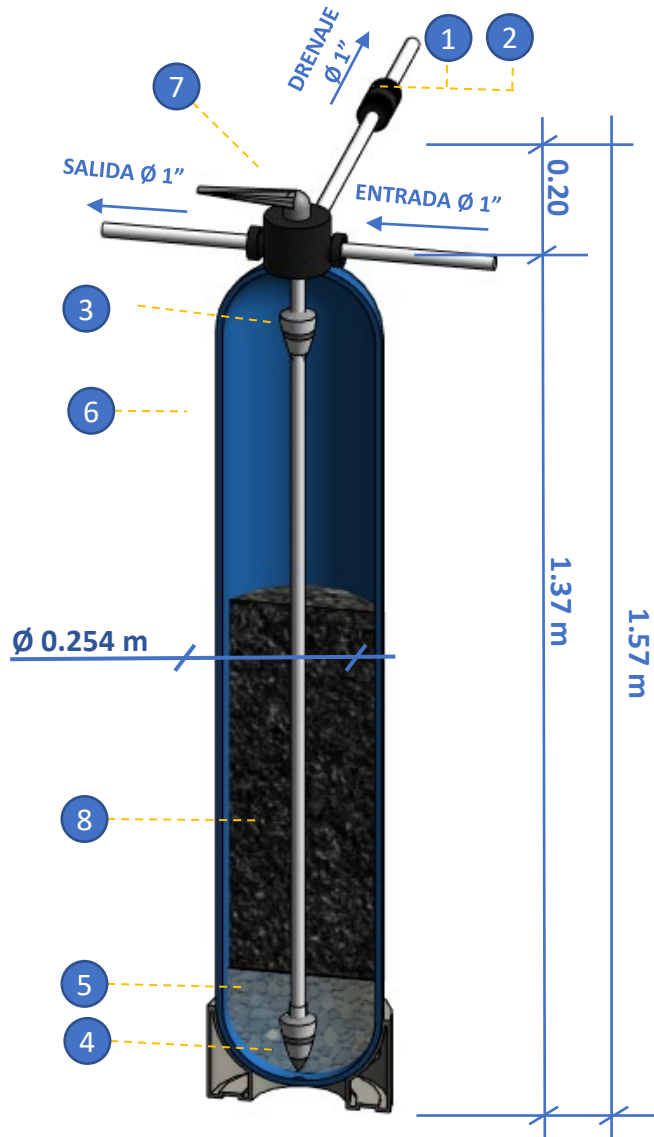

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

**EWS-
CA110M**

FILTRO DE CARBÓN ACTIVADO MANUAL

