


FILTRO DE CARBÓN ACTIVADO

COMPONENTES DEL SISTEMA

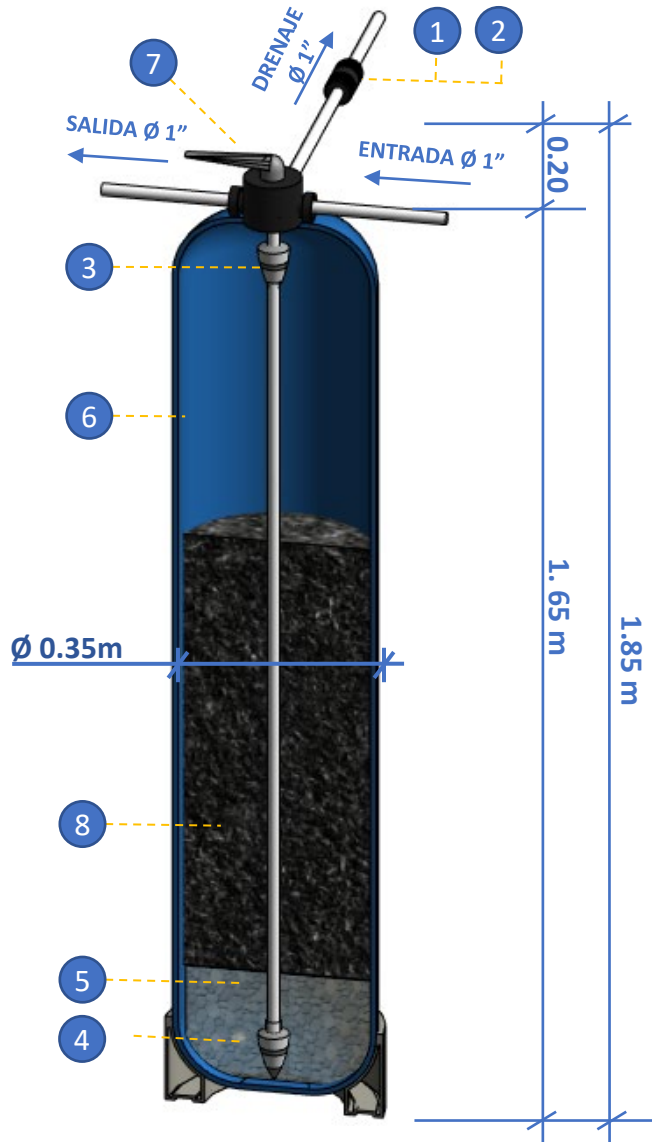

KIT069 FILTRO DE CARBÓN ACTIVADO MANUAL EWS-CA114M			
No.	Componente	Descripción	Cantidad
1	CFL002	HOUSING P/CONTROL FLUJO 5-10 (3/4 PVC)	1.00
2	CFL054	INSERTO PARA CONTROL DE FLUJO 10GPM	1.00
3	HBL010	TOP DISDRIBUIDOR 3/4 (SUPERIOR)	1.00
4	HBL008	BOTTOM DISTRIBUTOR (INFERIOR) 3/4" JD210	1.00
5	MFL605	GRAVA FILTRANTE #1	0.50
6	TNQ103	TANQUE 14X65 WAVE CYBER	1.00
7	VVL006	VÁLVULA MANUAL PARA FILTRO 1" F56A1	1.00
8	C105	CARBON GAC 12X40 W 25 KGS. C/U	1.60

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ² - DECLORINACIÓN	11
FLUJO EN SERVICIO @ 5 GPM FT ² - REMOCIÓN DE ORGANICOS	5
FLUJO EN RETROLAVADO	10
TEMPERATURA MAXIMA	42 °C
PRESIÓN MAXIMA	100 PSI
PRESIÓN MINIMA DE ENTRADA	25 PSI
CONEXIÓN ELECTRICA	
VOLTAJE	110 V
FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS	
ENTRADA	1
SALIDA	1
DRENAJE	1

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

EWS
CA114M

FILTRO DE CARBÓN ACTIVADO

