


FILTRO DE SEDIMENTO CON TURBIDEX

COMPONENTES DEL SISTEMA

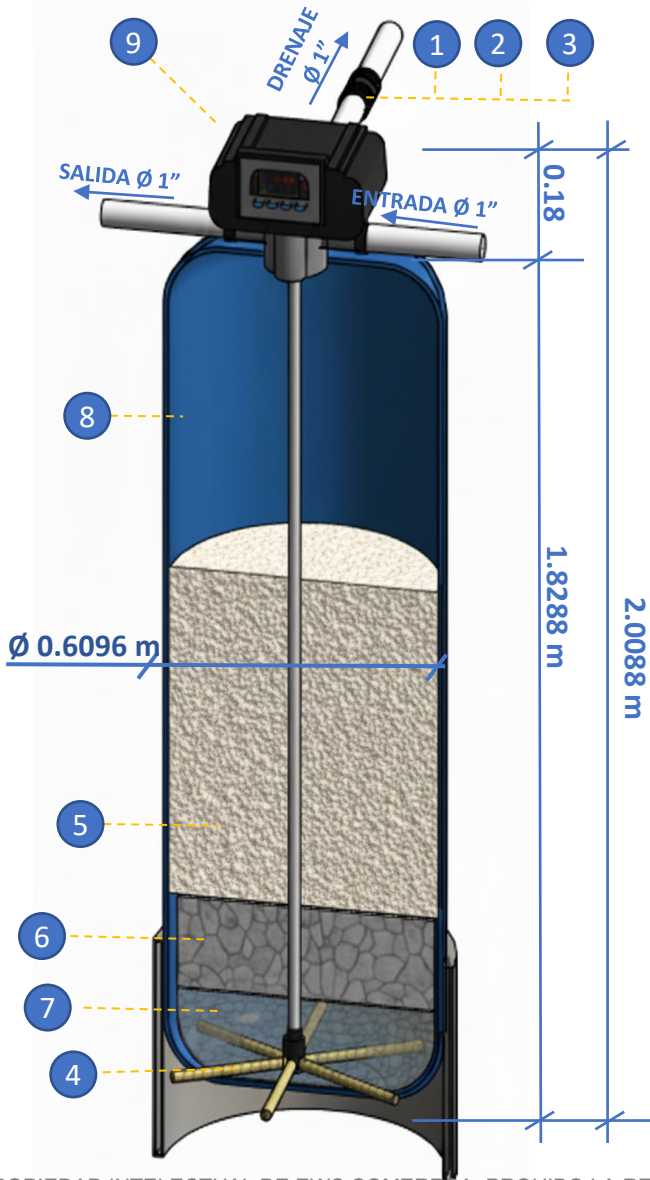

KIT007		FILTRO DE SEDIMENTO AUT EWS-FP124A	
No.	Componente	Descripción	Cantidad
1	CFL005	HOUSING CONTROL FLUJO 2" MAX. 70 GPM (7 AGUJEROS)	1.00
2	CFL053	INSERTO PARA CONTROL DE FLUJO 5.0 GPM	5.00
3	CFL054	INSERTO PARA CONTROL DE FLUJO 10GPM	2.00
4	HBL014	HUB AND LATERAL PARA TANQUES 24" JD303 (HU6540)	1.00
5	MFI002	TURBIDEX * 22.7 Kgs.	10.00
6	MFL605	GRAVA FILTRANTE #1	0.70
7	MFL607	GRAVA FILTRANTE #2	1.00
8	TNQ107	TANQUE PARA FILTRO FRP 24X72	1.00
9	VVL027	VALVULA AUTO P/FILTRO 2" 44GPM F75B1	1.00

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ²	31
FLUJO EN RETROLAVADO @ 15 GPM FT ²	45
TEMPERATURA MAXIMA	50 °C
PRESIÓN MAXIMA	100 PSI
PRESIÓN MINIMA DE ENTRADA	25 PSI
CONEXIÓN ELECTRICA	
VOLTAJE	110 V
FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS	
ENTRADA	2
SALIDA	2
DRENAJE	2

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCION PARCIAL O TOTAL DE ESTE DOCUMENTO

**AUT EWS-
FP124A**

FILTRO DE SEDIMENTO AUTOMATICO

