


FILTRO DE SEDIMENTO

COMPONENTES DEL SISTEMA

KIT008			
FILTRO DE SEDIMENTO EWS FP130A			
No.	Componente	Descripción	Cantidad
1	CFL005	HOUSING CONTROL FLUJO 2" MAX. 70 GPM (7 AGUJEROS)	1.00
2	CFL054	INSERTO PARA CONTROL DE FLUJO 10GPM	7.00
3	ATQ006	FLANGE ADAPTER 6" JD507	1.00
4	HBL015	HUB AND LATERAL P/TANQUES DE 30" JD304 (HU6600)	1.00
5	MFI002	TURBIDEX * 22.7 Kgs.	15.00
6	MFL605	GRAVA FILTRANTE #1	1.00
7	MFL607	GRAVA FILTRANTE #2	2.00
8	TNQ108	TANQUE PARA FILTRO FRP 30X72	1.00
9	VVL024	VALVULA AUTO. P/FILTRO 2" 79 GPM F77B1	1.00

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ²	49
FLUJO EN RETROLAVADO @ 15 GPM FT ²	70
TEMPERATURA MAXIMA	50 °C
PRESIÓN MAXIMA	100 PSI
PRESIÓN MINIMA DE ENTRADA	25 PSI
CONEXIÓN ELECTRICA	
VOLTAJE	110 V
FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS	
ENTRADA	2
SALIDA	2
DRENAJE	2

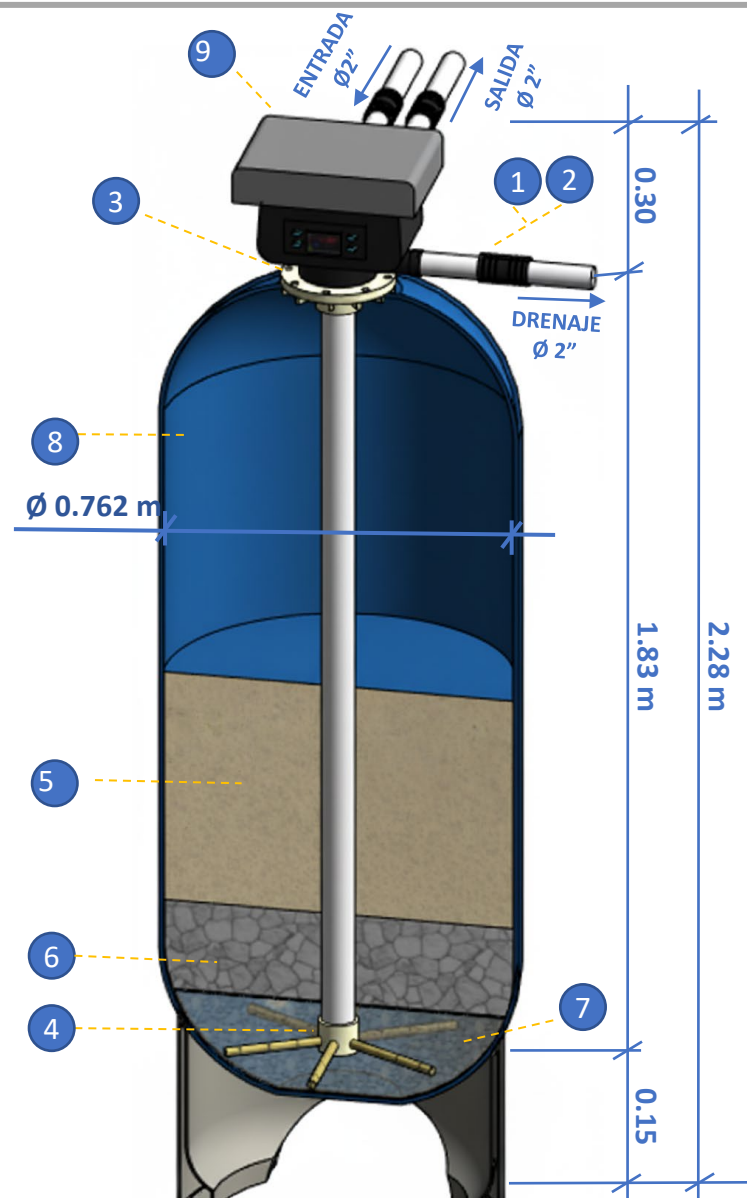

PROPIEDAD INTELECTUAL DE EWS COMERSSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

EWS
FP130A

FILTRO DE SEDIMENTO AUTOMATICO

