


FILTRO DE SEDIMENTO MANUAL

COMPONENTES DEL SISTEMA

KIT056 FILTRO DE SEDIMENTO MANUAL EWS-FP110M			
No.	Componente	Descripción	Cantidad
1	CFL002	HOUSING P/CONTROL FLUJO 5 10 (3/4 PVC)	1.00
2	CFL055	INSERTO PARA CONTROL DE FLUJO 7GPM	1.00
3	HBL008	BOTTOM DISTRIBUTOR (INFERIOR) 3/4" JD210	1.00
4	MFI002	TURBIDEX * 22.7 Kgs.	1.00
5	MFL605	GRAVA FILTRANTE #1	0.25
6	TNQ002	TANQUE FRP EWS 1054 TOP 2.5"	1.00
7	VVL006	VALVULA MANUAL P/FILTRO 1" IN OUT F56A1	1.00

ESPECIFICACIONES

FLUJO EN SERVICIO @ 10 GPM FT ² - DECLORINACIÓN		5
FLUJO EN RETROLAVADO		7
TEMPERATURA MAXIMA		42 °C
PRESIÓN MAXIMA		100 PSI
PRESIÓN MINIMA DE ENTRADA		25 PSI
CONEXIÓN ELECTRICA		
	VOLTAJE	110 V
	FRECUENCIA	60 Hz
CONEXIONES HIDRAULICAS		
	ENTRADA	1
	SALIDA	1
	DRENAJE	1

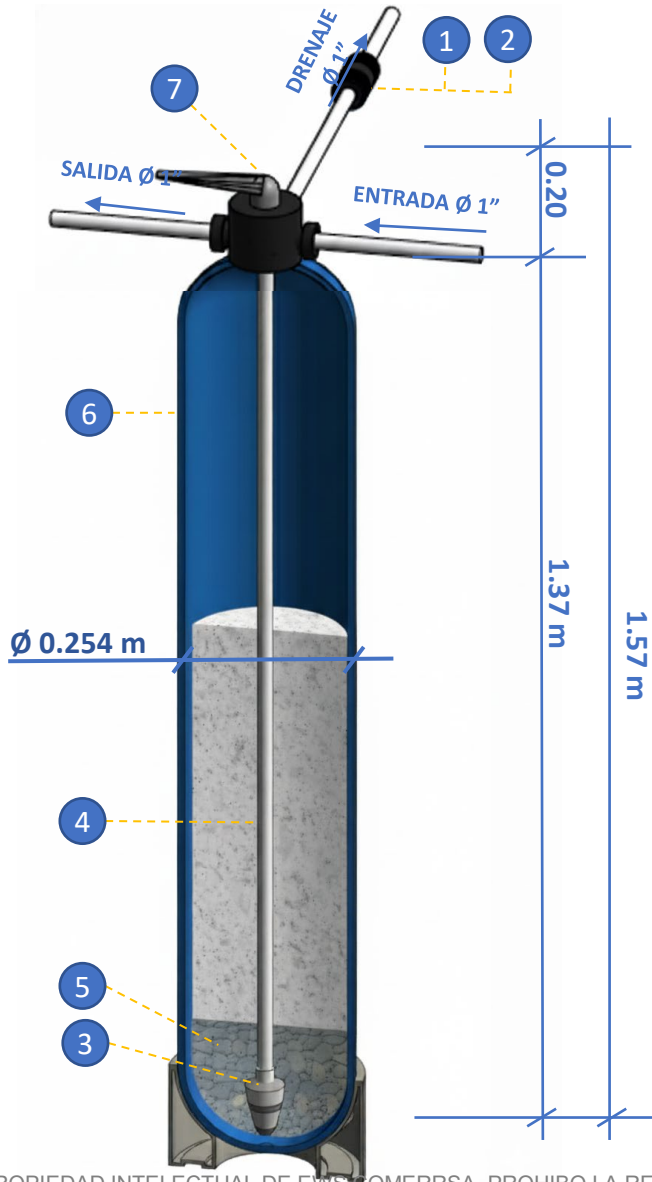

PROPIEDAD INTELECTUAL DE EWS COMERRSA. PROHIBO LA REPRODUCCIÓN PARCIAL O TOTAL DE ESTE DOCUMENTO

**EWS-
FP110M**

FILTRO DE SEDIMENTO MANUAL

