



## ACTIVATED CARBON FILTER CARTRIDGE CTO

### Features & Benefits


- A. High absorbency
- B. Reduce chlorine, bad taste and odors effectively
- C. Low pressure drop
- D. No carbon fines release

### Applications

- A. Drinking water
- B. Plating liquid
- C. Food industry
- D. Industrial water

### Specifications

- A. Filter media: Mineral AC & Coconut shell AC
- B. End cap: PP
- C. Gasket: Buna-N
- D. Netting: polyethylene
- E. Outer diameter: 70mm,115mm
- F. Inner diameter: 28mm
- G. Maximum operating temperature: 52°C
- H. Maximum differential pressure: 7 BAR at 20°C

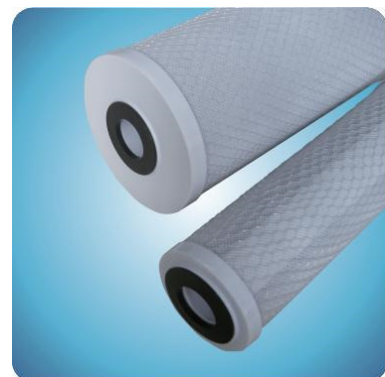

[www.ews.com.gt](http://www.ews.com.gt)

GUATEMALA-EL SALVADOR-HONDURAS-NICARAGUA-PANAMÁ