


DETAILED DESCRIPTION PMB CARTRIDGES

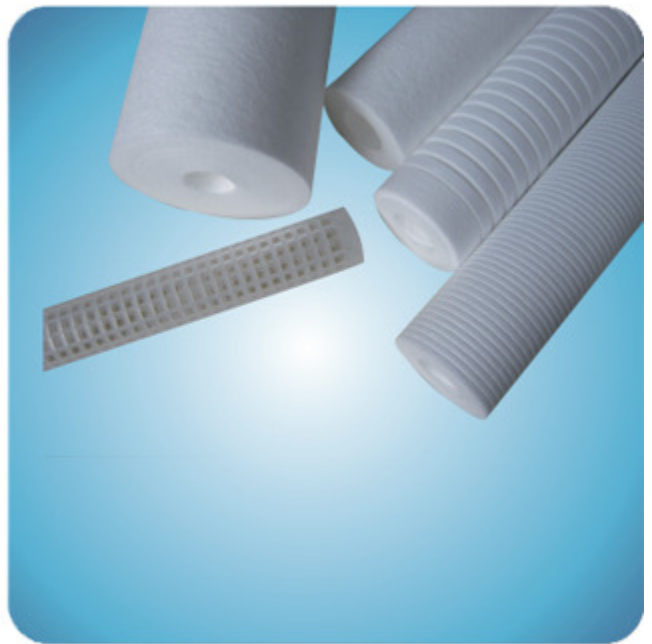

Features & Benefits

- A. Depth filter cartridges is constructed of quality polypropylene filter media to ensure high efficiency in the inner layer
- B. Thermal bonded micro-fiber construction offers no fiber release and consistent flow rates as well as superior filtration performance
- C. High dirt holding capacity.
- D. Materials are FDA listed as acceptable for potable and edible; Available in a wide selection of micron rating from 1 μ m to 100 μ m

Applications

Información y ventas

PBX: (502) 6634-3737

Email: info@ecotec-centroamerica.com

Web: www.ecotec-centroamerica.com

Guatemala-Guatemala

- A. Drinking water treatment
- B. Pre-filtration for RO+DI
- C. Acid and lye filtration in electronic industry
- D. High technology coatings
- E. Plating, Chemicals and Solvents

Specifications

Material of Construction

- A. Media: Polypropylene microfiber 100%
- B. Core: Polypropylene/None

Recommended Operating Conditions

- A. Max. Differential pressure: 3.5bar at 20°C
- B. Recommended change out: 1- 1.5bar
- C. Maximum temperature: 80°C

Removal Ratings(μm)

- A. 1,3,5,...100

Información y ventas

PBX: (502) 6634-3737

Email: info@ecotec-centroamerica.com

Web: www.ecotec-centroamerica.com

Guatemala-Guatemala

Ordering Guide

Model PM	Media Type	Support Core	Dimension	Micron Rating	End Adaptor	Seal	Length Inch
PM-1 Standard	P-High performance A-Absolute grade	P-PP	S-ID28mm	0.10:1µm	Code	E-EPDM N-Buna S-Silicone V-Viton T-Teflon Encapsulated viton	5:5" 10:10" 20:20" 30:30" 40:40"
PM-2 Thin groove		N-None	OD62-65mm	0.30:3µm 0.50:5µm 10:10µm	0-DOE w/o adaptor Code 7-226/Fin Code 8-222/Fin		
PM-3 Broad groove			B-ID28mm OD110-115mm L-ID96/114mm OD150mm	Code 3-222/Flat closed Code 2-226/Flat closed		

Información y ventas

PBX: (502) 6634-3737

Email: info@ecotec-centroamerica.com

Web: www.ecotec-centroamerica.com

Guatemala-Guatemala