


Wall Mounted Ozone Generator **GQO-V04**

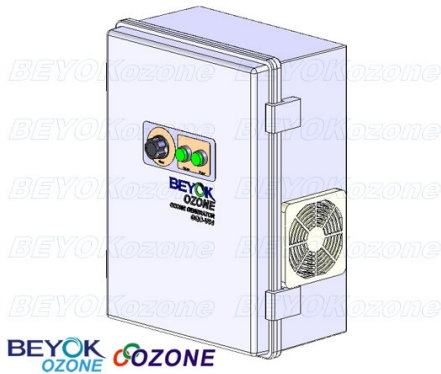

Ozone Output:	2-4 g/hr@15Lpm Air
Ozone Generating Method:	Corona Discharge
Electrical:	220V/50Hz-120V/60Hz, 120W
Pump Output:	10-15 L/min, 20KPa
Control:	0 ~ 30min Timer
Cooling Method:	Air cooled
Inlet & Outlet Connection:	0.3" * 0.2" (7*4mm) Stainless steel & Hose
Case:	Plastic
Dimension (LxWxH):	9.9" * 13.9" * 5.9" (252*352*150 mm)
Net Weight:	13.2lbs (6.0 kg)

The GQO-V series of BEYOK wall mounted ozone generators can mix ozone into water to destroy bacteria, purify air and eliminate peculiar smell. Connect to the external oxygen source will provide a higher concentration of ozone.

Features:

- Wall mounted
- 50~100% variable ozone output control
- Compact design and simple operation
- Oxygen or dry air feed
- High efficiency
- Work continuously
- Economical, and low running costs
- Long working life

Benefits:

- High efficient broad-spectrum sterilization
- Good dispersion
- Without ozone residual and secondary pollution

Application:

- Sterilization and disinfection: restaurant, hospital, packing workshop, food factory.
- Food fresh keeping: refrigerated storage.
- Deodorization: basement, garage, store room, hotel.

Size View:

