

SBG1

Strong base type 1 anion resin, styrene/DVB gel, chloride form

ResinTech SBG1 is a type 1 high solids gel strong base anion resin in chloride form. It has high crosslinkage and higher ion exchange capacity than other strong base anion resins resulting in especially high selectivity for various anions. SBG1 is intended for the removal of contaminants such as nitrate, arsenate, chromate, uranium, etc.



FEATURES & BENEFITS

- High total capacity for long run lengths
- Lower TOC leach rate
- Superior physical stability
- Controlled particle size
- Low pressure drop & better kinetics
- Complies with US FDA regulations

APPLICATIONS

- Nitrate Reduction
- Sulfate Reduction



Meets NSF/ANSI/CAN 61

Kosher Certified

Meets NSF/ANSI/CAN 372


Halal Certified

REACH Registered

Conforms to §21CFR173.25 of the USFDA Food Additives Regulations


Polymer Matrix	Styrene/DVB	Minimum Sphericity (%)	93
Polymer Type	Gel	Reversible Swelling	18 to 25% (Cl → OH)
Ionic Form (as shipped)	Chloride (Cl ⁻)	Uniformity	Gaussian
Functional Group	Trimethylamine	Uniformity Coefficient	1.60
Physical Form	Spherical Beads	Capacity (meq/mL)	1.40
Particle Size US Mesh (μm)	16 (1190) to 50 (297)	Moisture Retention (%)	42 to 51
< 50 mesh (300 μm) %	< 1%	Shipping Weight	42 - 44 lbs/cu.ft. (673 - 705 g/L)
		Color	White To Amber

PRESSURE LOSS

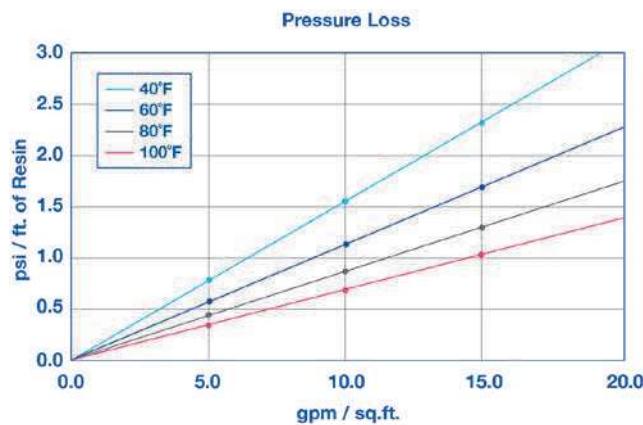

The graph above shows the expected pressure loss of ResinTech SBG1 per foot of bed depth as a function of flow rate at various temperatures.

BACKWASH EXPANSION

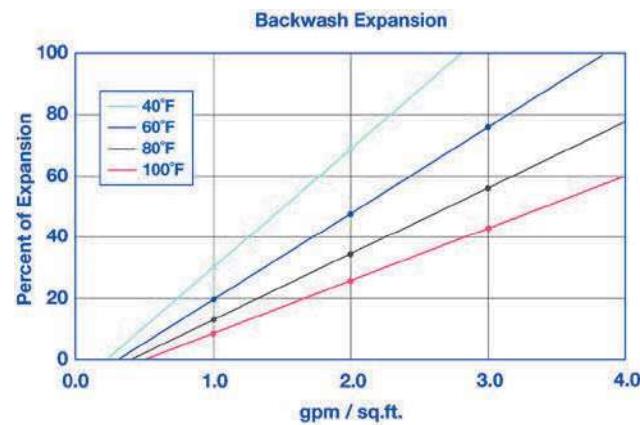


The graph above shows the expansion characteristics of ResinTech SBG1 as a function of flow rate at various temperatures.

SUGGESTED OPERATING CONDITIONS

Maximum Temperature	170°F (77°C)	Operating pH Range	0 to 14
Minimum Bed Depth	24 in. (61.0 cm)	Flow Rate	
Maximum Pressure Loss	20 psi (138 kPa)	Working Service	Depends on fluid viscosity. Contact ResinTech
Backwash Expansion (%)	25 - 50		

CAPACITY GRAPH 1

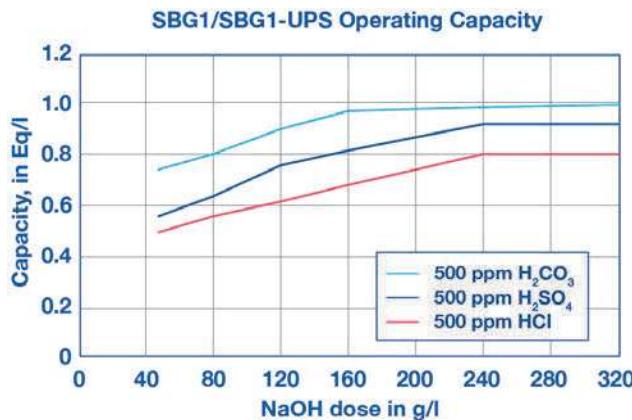

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO_3 , 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.

TRACE CONTAMINANT REMOVAL (U, Cr, As, Se, ClO_4)

ResinTech **SBG1** has high capacity and can be used to remove a variety of trace contaminants, even when that contaminant is not highly preferred compared to the other bulk ions in the feed water. Useful capacities are obtained when the feed water TDS is substantially less than the resin's internal TDS. Uranium, chromate, and perchlorate are particularly well removed. Arsenate and selenate are well removed but can be chromatographically displaced by sulfate and other ions.

NITRATE REMOVAL

ResinTech **SBG1** can be used in the chloride cycle to reduce nitrates along with sulfates. Regeneration is accomplished with sodium chloride brine, in a fashion similar to water softeners. Although high operating capacities and high salt efficiency can be obtained, there is also the possibility of nitrate dumping. Use of chloride form anion resin reduces pH during the early portion of the exhaustion cycle. When treating waters with high hardness the brine dilution and displacement waters should be softened and a low hardness salt used to prevent scaling during regeneration.

SULFATE REMOVAL

High capacity resins such as ResinTech **SBG1** have high affinity for divalent anions such as sulfate, provided the feed water TDS is not greater than about 5,000 ppm. At higher TDS the resin loses its affinity for sulfate and begins to prefer chloride. Regeneration is accomplished with sodium chloride brine in a fashion similar to a water softener.

DEMINERALIZATION

See ResinTech **SBG1-OH**.

REGENERATION DETAILS

Hydroxide Cycle (NaOH)	2% - 6%	Displacement Flow Rate	Same as dilution water
Salt Cycle (NaCl)	2% to 10%	Displacement Volume	10-15 gals/cu.ft. (1-2 BV)
Regenerant Level	4-10 lbs/cu.ft. (64.1-160.2 g/L)	Rinse Flow Rate	Same as Service Flow
Regenerant Flow Rate	0.25-1.0 gpm/cu.ft. (2-8 BV/h)	Rinse Volume	36-60 gals/cu.ft. (5-8 BV)
Regenerant Contact Time	> 40 minutes		

PACKAGING**Standard**

42 cu.ft. Supersack | 7 cu.ft. Drum
1 cu.ft. Bag | 5 cu.ft. Drum

Metric

25L Bag | 140L Drum

SAFETY DATA SHEETS (SDS)

Safety Data Sheets (SDS) are available for all products on the ResinTech website. They contain important health and safety information that may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used.

These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further we assume no liability for the consequences of any such actions.

Safety Data Sheets (SDS) are available at resintech.com

Page 4 of 4

Last Update: 14-Jan-26

